





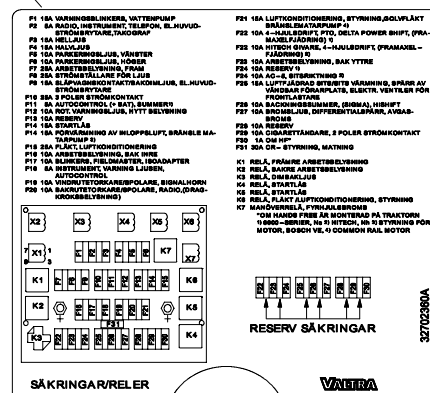

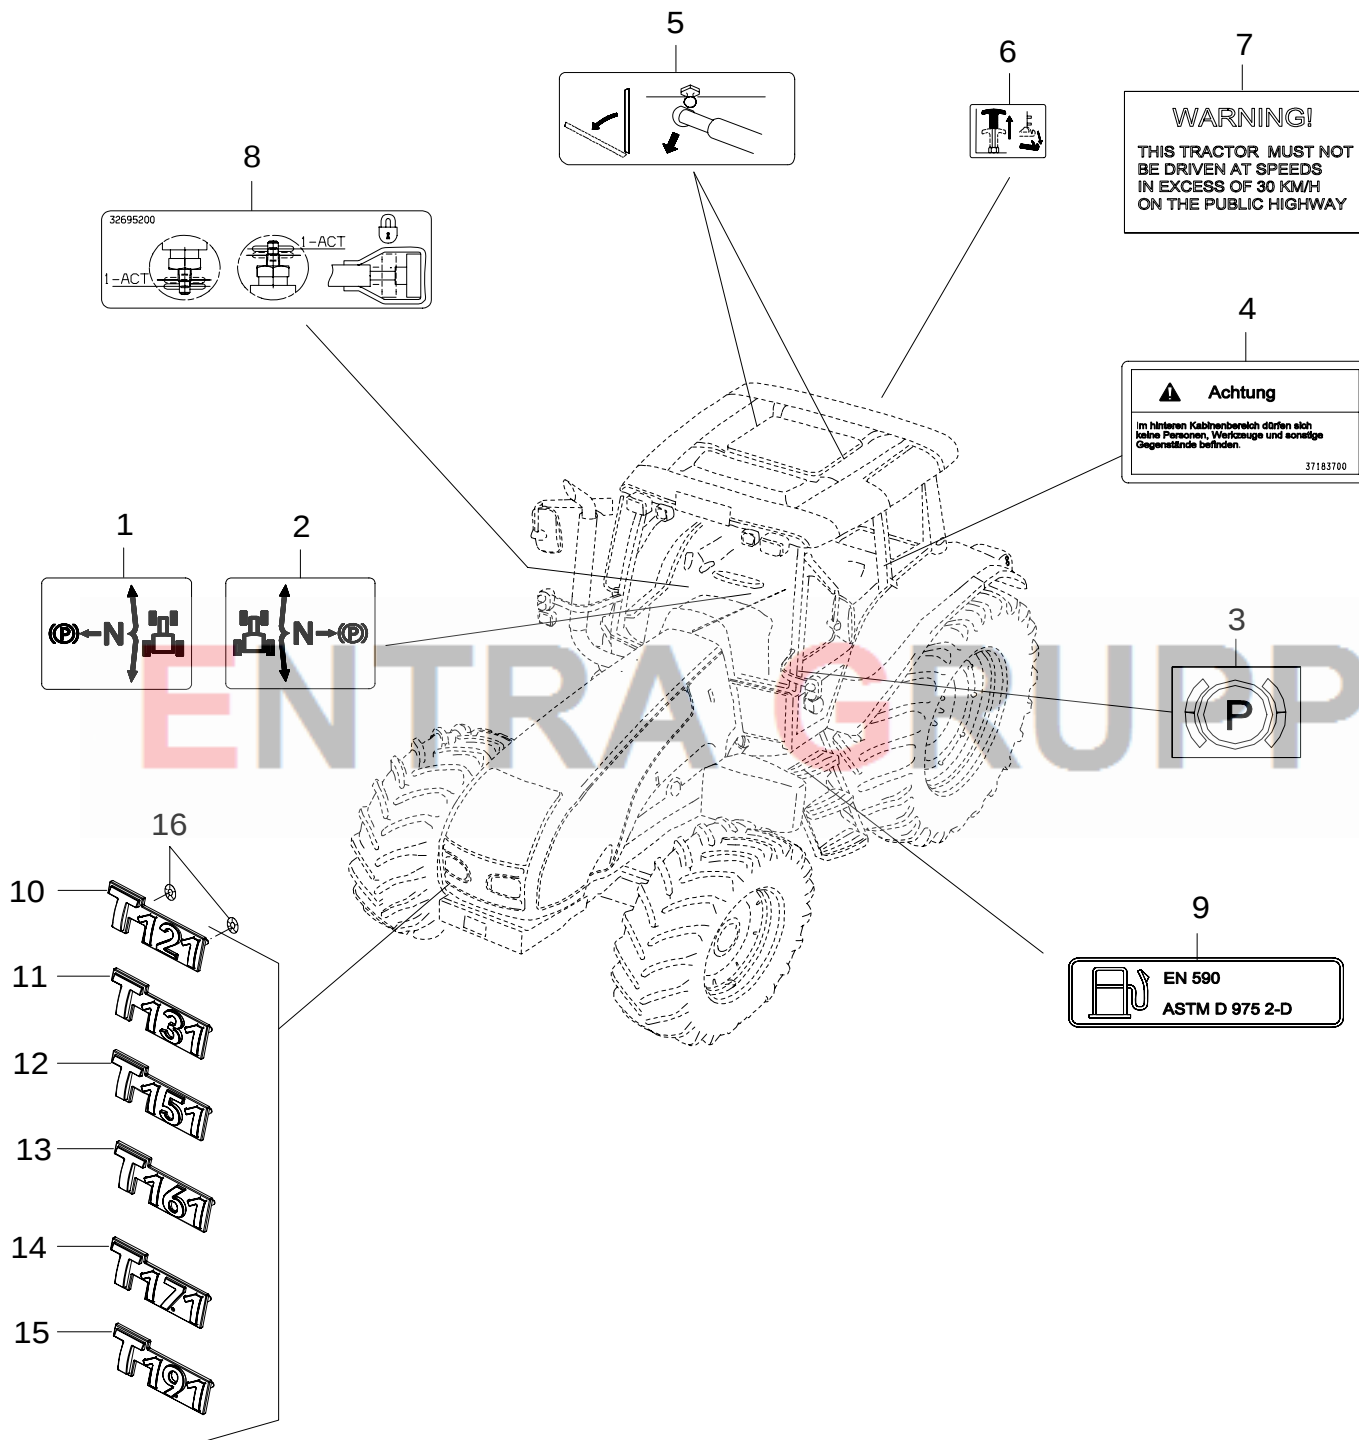


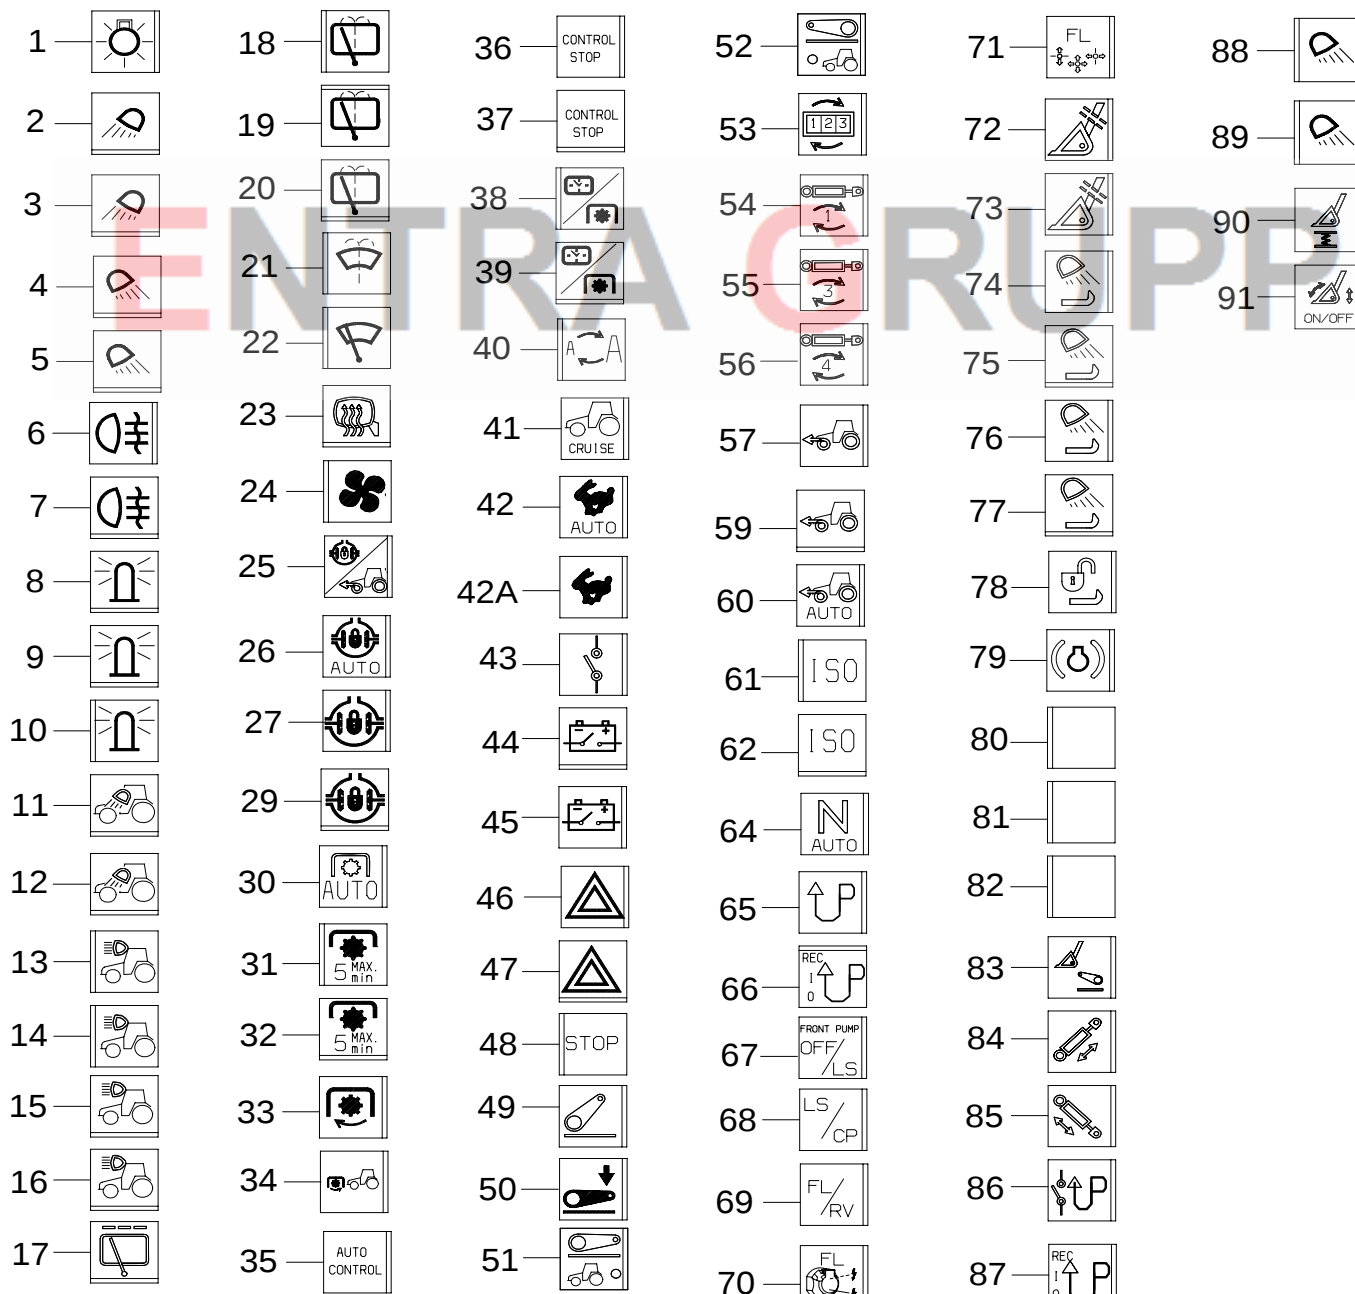


Linssin asennus
Lens adjustment

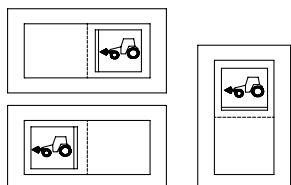

2

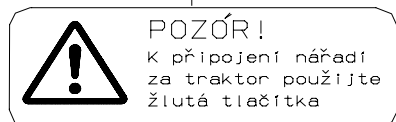

3



4





1



6

5

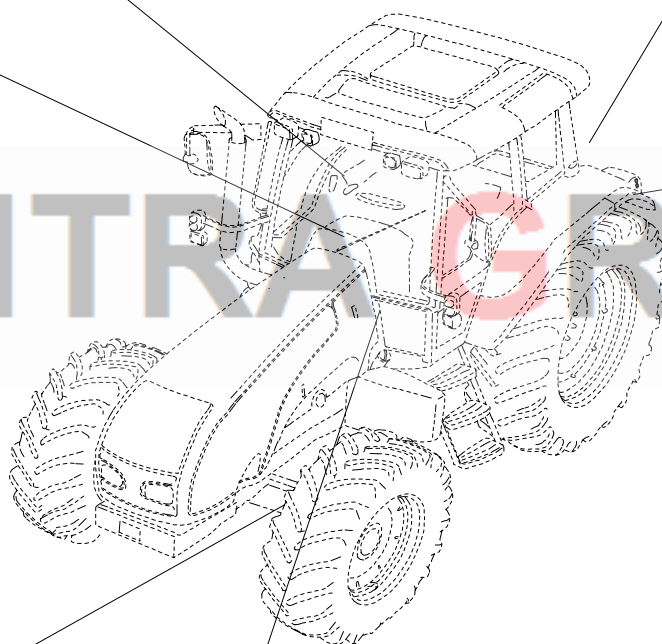

ENTRA GRUPP

CAUTION

To avoid injury

- Read the Operators Instruction Book for safety information and operating instructions.
- Fasten your seat belt before tractor operation.
- Start engine only when seated in operator's seat.
- Make sure everyone is clear of tractor and equipment before starting engine or operation.

- Keep all shields, covers and guards in place and stay away from moving parts while engine is running.
- Place transmission shift lever in neutral and apply parking brake before using external 3-point hitch controls.
- Apply parking brake, lower equipment, stop engine and remove key before leaving the tractor unattended.

- Wait for all movement to stop before servicing tractor or equipment.
- Securely support or block lifted implements which must be in the raised position for servicing or adjustment.
- Couple brake pedals together for road travel.
- Use flashing warning lights and SMV emblem when on public roads, except where prohibited by law.
- Always drive with care and attention.

WARNING

Serious personal injury or machine damage may result from overspeed of PTO driven equipment. Do not operate PTO above recommended maximum speed.

Normal	Maximum at 2400rpm
540	1052
1000	1200

For further information refer to operator instruction book.

WARNING

USE SEAT BELT.

Keep seat belt adjusted snugly.

Do not jump if tractor tips.

WARNING

Personal injury may result from PTO driveline separation.

DRAWBAR: adjust to DISTANCE "A" to suit PTO RPM and SHAFT SIZE:

PTO RPM	SHAFT SIZE	DISTANCE "A"
540	35mm (1.38 in)	360mm (13.78 in)
1000	35mm (1.38 in)	400mm (15.85 in)
1000	45 mm (1.75 in)	500mm (19.69 in)

THREE-POINT HITCH: distance "C" and mounted implement distance "D" may not be standard.

Measure distance "B" over complete lift range for tractor and implement combination. Select driveline length to ensure that driveline will not bottom out at minimum distance "B" and will have sufficient overlap at maximum distance "B".

WARNING

Beware of hot surfaces.

WARNING

NO RIDERS

WARNING

To prevent serious injury or death from loss of control:

- apply parking brake and shut off engine before turning operator's station;
- do not operate on public roads with operator's station reversed; lighting and marking are not compatible with reverse travel;
- keep brake pedals locked together when operating in reverse position.


DANGER

Start only from seat with transmission and PTO in neutral.

Starting in gear kills.

WARNING

Remove negative cables from batteries before removing solenoid cover and before servicing the electrical system.

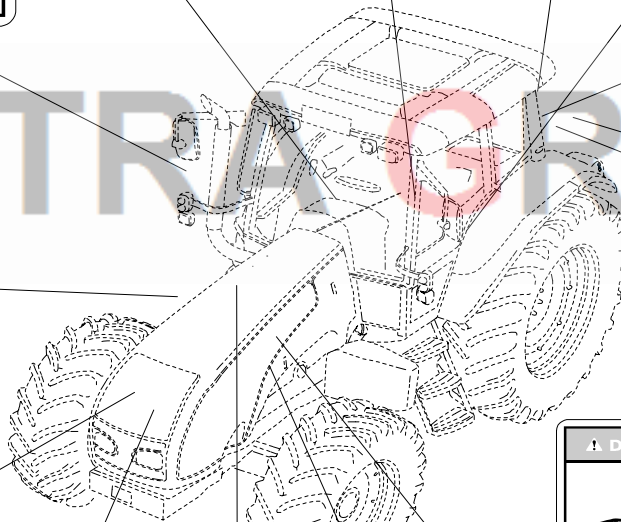

DANGER	DANGER	WARNING
Pull only from approved drawbar or lower links of 3-point linkage at horizontal position or below.	Rotating driveline contact may cause serious injury or death. Keep all driveline tractor and equipment shields in place during operation.	Stand clear when using switch to move 3 point hitch.

WARNING

Beware hot parts.

To avoid personal injury, keep all shields, covers and guards in place while engine is running.

WARNING

Keep hands clear of fan and belts while engine is running.

WARNING

Battery posts, terminals, and related accessories contain lead and lead compounds, chemicals known to the State of California to cause cancer and reproductive harm. Wash hands after handling.

DANGER

Shield eyes	Explosive gas	Avoid sparks and flame	Sulphuric acid
Always shield eyes and face from battery. Cigarettes, flames or sparks could cause battery to explode. Do not charge or use booster cables or adjust post connections without proper instruction or training.			POISON causes severe burns. Contains sulphuric acid. Avoid contact with skin, eyes or clothing. In event of accident flush with water and call a physician immediately. Keep out of reach of children.


WARNING

High pressure steam and hot water. Remove filler cap with extreme care.


1.6.2007

T121c, T121h, T131c, T131h,
T151eh, T151eLS, T161c, T161h,
T161LS, T171c, T171h, T171LS,
T191h, T191LS


AIRFILTER CAB

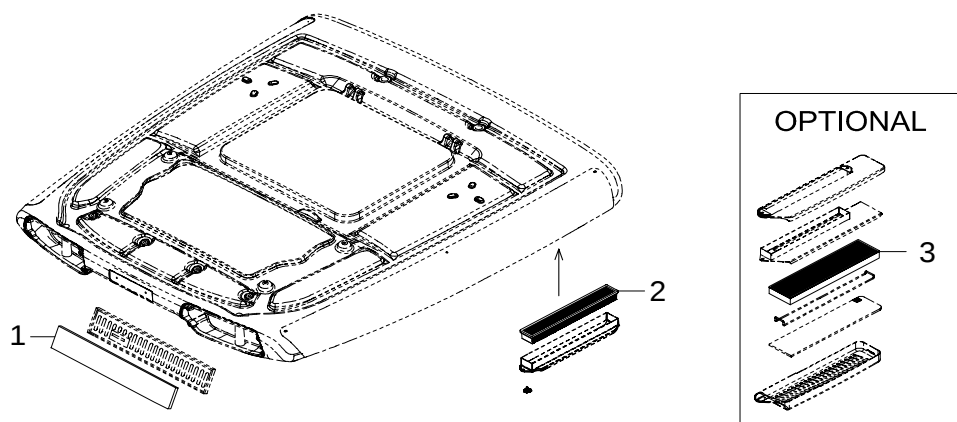


OILFILTER ENGINE




AIRFILTER ENGINE

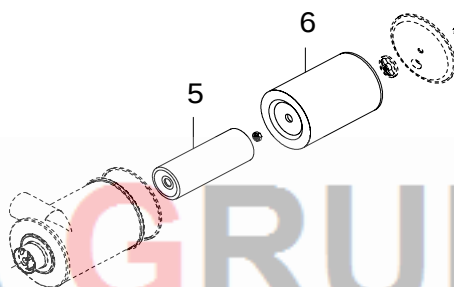



FUEL FILTERS

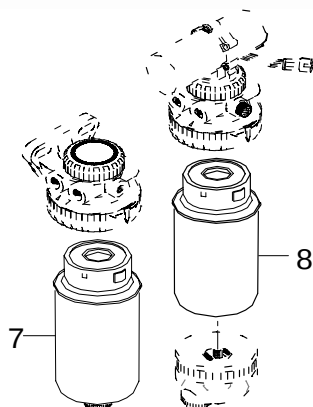


HYDRAULIC AND LOW PRESSURE HYDRAULIC FILTERS

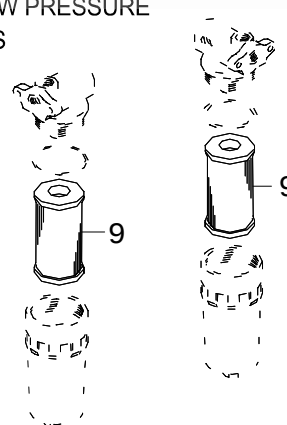

OILFILTER GEARBOX

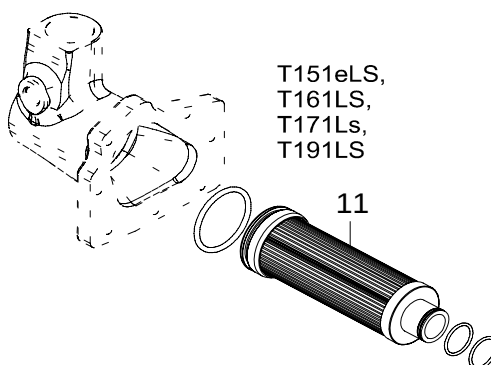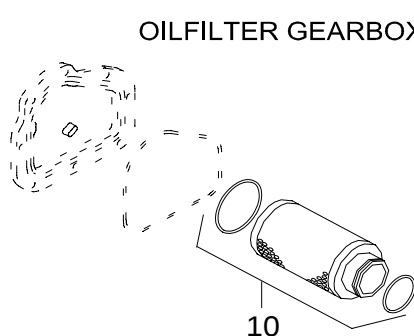

T151eLS,
T161LS,
T171LS,
T191LS



1.6.2007


T121c, T121h, T131c, T131h,
T151eh, T151eLS, T161c, T161h,
T161LS, T171c, T171h, T171LS,
T191h, T191LS

100 h




1

500 h



2

1000 h

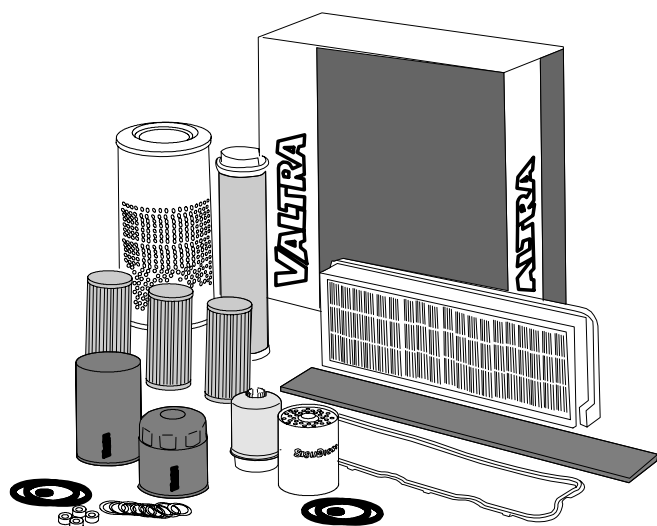

3

4

+ 2000 h

